



GFE-MCPE-C

Conventional Manual Call Point

MANUAL - 01/2017



MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL


Tel: +351 289 896 560 • Sales: sales@globalfire.pt • Technical Support: techs@globalfire.pt • www.globalfire.pt

TECHNICAL SPECIFICATIONS

OPERATING VOLTAGE	20-30 V DC
CURRENT CONSUMPTION - QUIESCENT	200 μ A
CURRENT CONSUMPTION - ALARM	50 mA @ 24 V DC nominal - Alarm Resistance 470 Ohms max.
TEMPERATURE - OPERATING	-10°C to +55°C
TEMPERATURE - STORAGE	-30°C to +60°C
INGRESS PROTECTION GRADE	IP24D - Type A - Indoor Use
COLOUR / CASE MATERIAL	Red / ABS & Clear/ PC - Flame Retardant - Rating 94 V0
MAX. HUMIDITY	95% Non-Condensing @ 40°C
WEIGHT	152 g includes back box and fixings
DIMENSIONS - SURFACE MOUNTED	92.6 (W) x 92.6 (H) x 60.1 (D) mm
DIMENSIONS - FLUSH MOUNTED	92.6 (W) x 92.6 (H) x 27.8 (D) mm

ORDER CODE	CERTIFICATE	DESCRIPTION
GFE-MCPE-C	1328-CPR-0377	CONVENTIONAL MANUAL CALL POINT


MECHANICAL SPECIFICATION

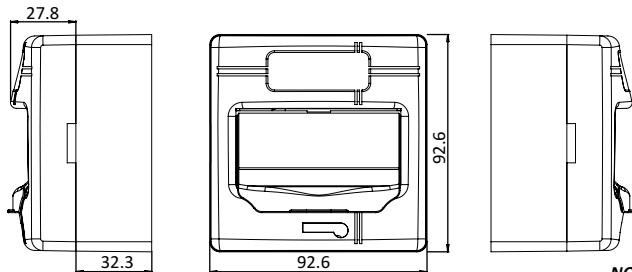

NOTE: All dimensions in mm

CONNECTIONS

Please note that this device is polarised,
please ensure that both zone connections, are kept on the same terminal in all the modules.
The positive side of the zone should be connected to the RED wire and negative to the BLACK wire.

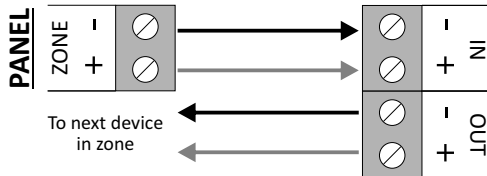

NOTE: Only last device in zone should have e.o.l. (end of line) fitted across OUT zone terminals.