


## Orman MAX Line - SVL

DC01 ; EMKA; IP 20;

NOSIVOST ORMANA – 800 kg

Dimenzija (SxD)	600x600	600x800	600x1000	800x800	800x1100	Visina (H)	Boja
16U		✓ ( 57 kg)	✓ ( 63 kg)	✓ ( 67 kg)	✓ ( 79 kg)	884 mm	RAL 7035 / RAL 9005
22U		✓ ( 67 kg)	✓ ( 73 kg)	✓ ( 78 kg)	✓ ( 91 kg)	1150 mm	RAL 7035 / RAL 9005
26U	✓ ( 65 kg)	✓ ( 73 kg)	✓ ( 81 kg)	✓ ( 86 kg)	✓ ( 99 kg)	1328 mm	RAL 7035 / RAL 9005
32U	✓ ( 79 kg)	✓ ( 88 kg)	✓ ( 99 kg)	✓ (102 kg)	✓ (115 kg)	1595 mm	RAL 7035 / RAL 9005
36U	✓ ( 90 kg)	✓ (100 kg)	✓ (110 kg)	✓ (113 kg)	✓ (126 kg)	1771 mm	RAL 7035 / RAL 9005
42U	✓ (100 kg)	✓ (111 kg)	✓ (122 kg)	✓ (126 kg)	✓ (144 kg)	2040 mm	RAL 7035 / RAL 9005
47U	✓ (110 kg)	✓ (123 kg)	✓ (140 kg)	✓ (143 kg)	✓ (151 kg)	2264 mm	RAL 7035 / RAL 9005

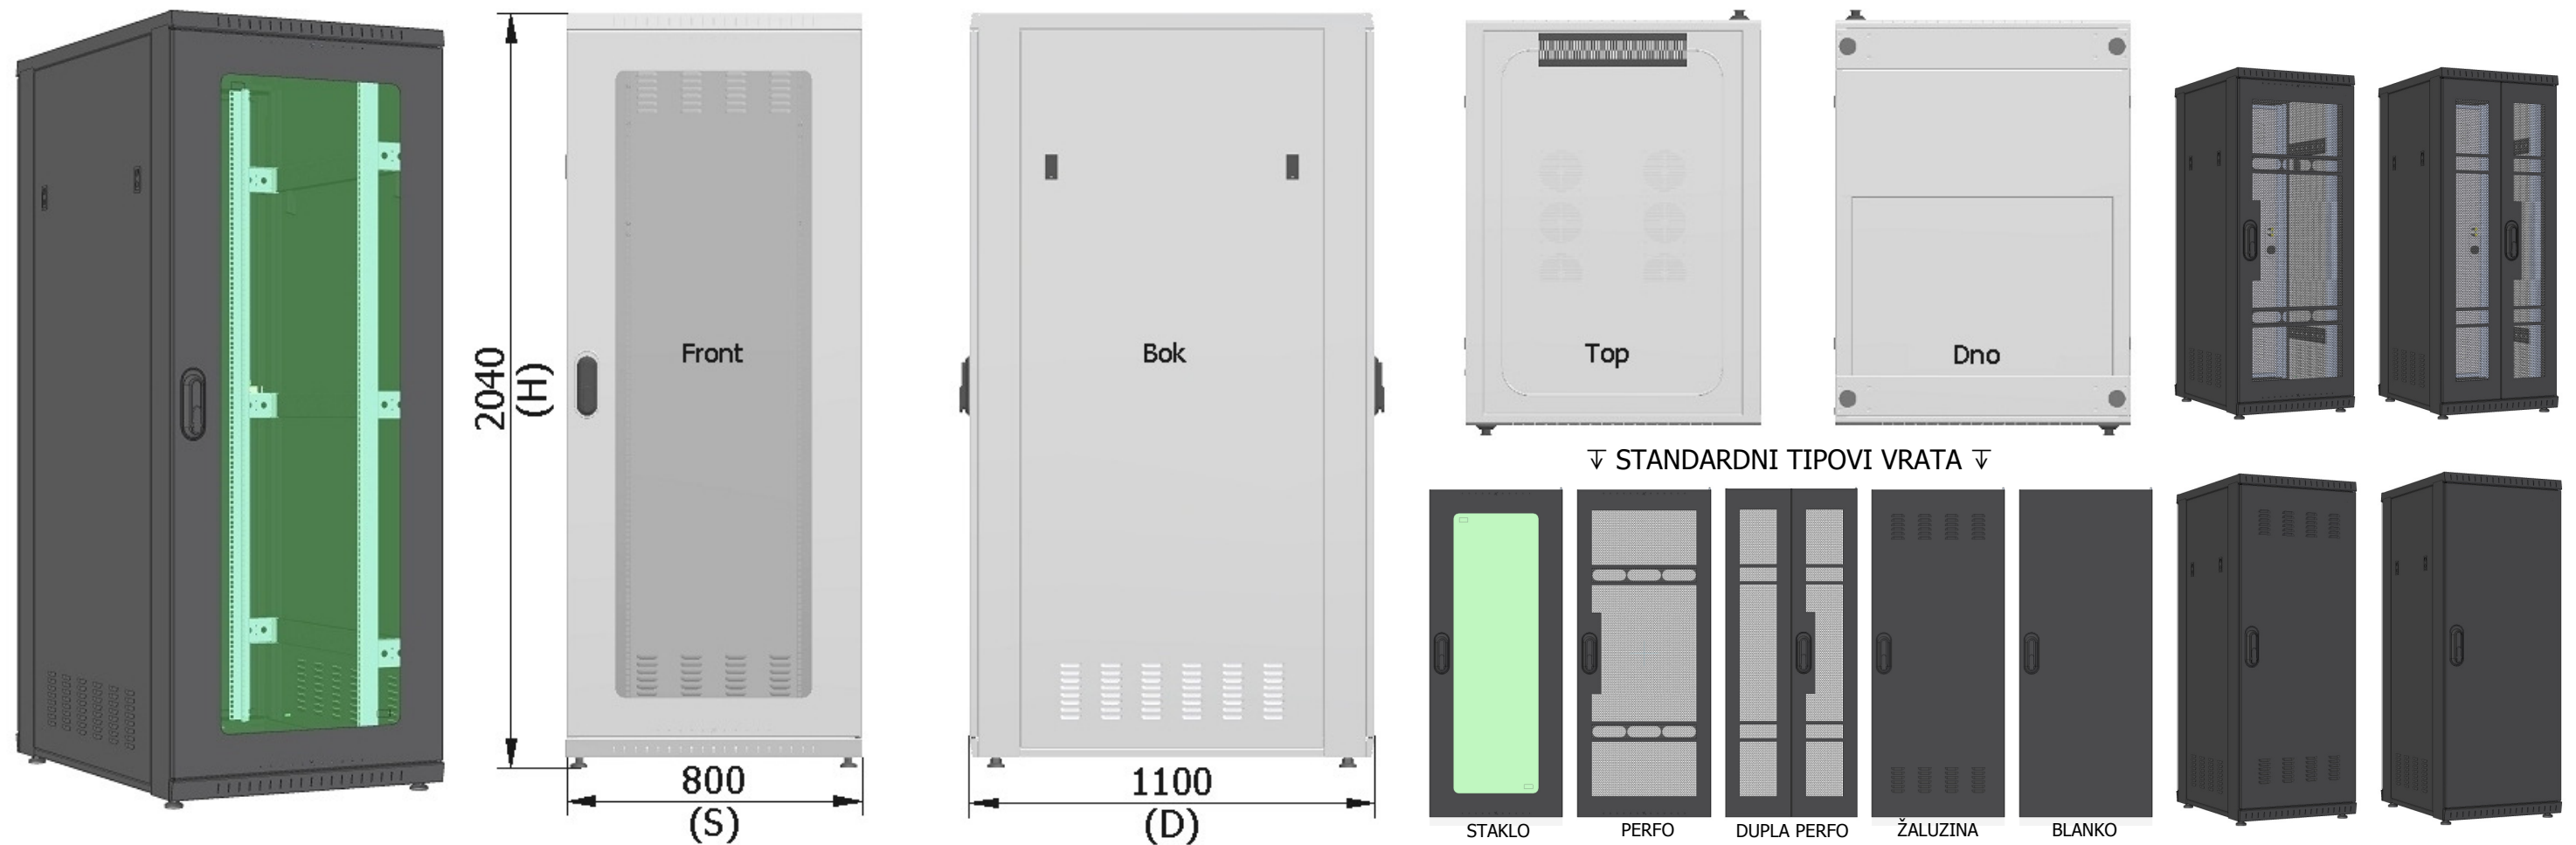

OSNOVNE KARAKTERISTIKE: °°° Nosivost ormara 800 kg °°° Demontažne bočne strane °°° 4 podešavajuće stope (ili točka) °°° 2 para raster letvi 19 inch (ili ETSI) °°°  
 °°° Demontažni dno i poklopac sa otvorima za ventilatore i prolaz kablova °°° Uzemljenje svih elemenata °°° RAL 7035 ili RAL 9005 °°°