

BEYOND

# SCB-5000PH

1000TVL (1280H) Camera




\* Lens not included

## Key Features

- High resolution of 1000TV lines (Color), 1000TV lines (B/W)
- Min. illumination 0.03Lux@F1.2, 50IRE, 0.01Lux@F1.2, 30IRE
- SDDR, SSNRIV, Defog
- Coax : Pelco-C (Coaxitron), 230V AC

## Dimensions

Unit : mm (inch)

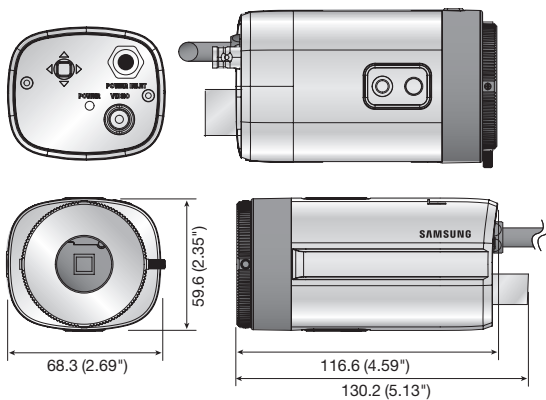

SCB-5000PH	
<b>VIDEO</b>	
Imaging Device	1/3" 1.3M CMOS
Total Pixels	1,312(H) x 1,069(V)
Effective Pixels	1,305(H) x 1,049(V)
Scanning System	Progressive scan
Synchronization	Internal
Frequency	H : 15.625KHz / V : 50Hz
Horizontal Resolution	Color : 1000TV lines, B/W : 1000TV lines
Min. Illumination	0.03Lux (F1.2, 50IRE), 0.001Lux (1sec, F1.2, 50IRE) 0.01Lux (F1.2, 30IRE), 0.0003Lux (1sec, F1.2, 30IRE)
S / N Ratio	52dB (AGC off, Weight on)
Video Output	CVBS : 1.0Vpp / 75Ω composite
<b>LENS</b>	
Focus Control	Manual
Lens Type	Manual / DC auto iris
Mount Type	C / CS
<b>OPERATIONAL</b>	
On Screen Display	English, Chinese, Korean, Japanese, German, Italian, French, Spanish, Russian, Czech, Polish, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese
Camera Title	Off / On (Displayed 15 characters)
Day & Night	Auto (Electrical) / Color / B/W
Backlight Compensation	Off / User BLC / HLC
Contrast Enhancement	SDDR (Off / On)
Digital Noise Reduction	SSNRIV (Off / On)
Defog	Off / Auto / Manual
Purple Fringe Reduction	Off / Low / Middle / High
Digital Image Stabilization	Off / On
Tampering	Off / On
Motion Detection	Off / On
Privacy Masking	Off / On (24 programmable zones with 4 points polygonal masking)
Gain Control	Off / Low / Middle / High
White Balance	ATW / Outdoor / Indoor / Manual / AWC / Mercury (1,800K° ~ 10,500K°)
Electronic Shutter Speed	1sec ~ 1/12,000sec
Digital Zoom	Off / On (1x ~ 16x)
Reverse	Off / H-Rev / V-Rev / HV-Rev
Profile	Basic, Day & Night, Backlight, ITS, Indoor, User
Communication	Coaxial control (SPC-300 compatible)
Protocol	Coax : Pelco-C (Coaxitron)
<b>ENVIRONMENTAL</b>	
Operating Temperature / Humidity	-10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH
<b>ELECTRICAL</b>	
Input Voltage / Current	230V AC ±10%
Power Consumption	Max. 4.6W
<b>MECHANICAL</b>	
Color / Material	Black, Ivory / Aluminum, Plastic
Dimensions (WxHxD)	68.3 x 59.6 x 116.6mm (2.69" x 2.35" x 4.59")
Weight	396g (0.87 lb)

\* The latest product information / specification can be found at [www.samsungsecurity.com](http://www.samsungsecurity.com)

## Available Lenses / Accessories (Optional)

