



# Valkyrie CS IP65

ma\_valkyriescip65\_01\_010002\_en\_190218



MADE IN PORTUGAL - EU

**Conventional Wall Sounder/Beacon - Outdoor Use-IP65**

## GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL

Tel: +351 289 896 560 • Sales: [sales@globalfire.pt](mailto:sales@globalfire.pt) • Technical Support: [techs@globalfire.pt](mailto:techs@globalfire.pt) • [www.globalfire.pt](http://www.globalfire.pt)

## TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	20 V to 30 V DC
CURRENT - SOUNDER/BEACON ACTIVE	10 mA - 280 mW @ 28 V DC
MAXIMUM SOUNDER OUTPUT	97 db (@ 1 meter - 30 V DC)
CABLE SIZE	0.5-2.5 mm <sup>2</sup>
RESET/START-UP TIMES	20 seconds max.
COLOUR / CASE MATERIAL	Red / ABS & PC - Flame Retardant rating 94V0
OPER. TEMPERATURE	-20°C to 70°C
MAX. HUMIDITY	95% RH Non-Condensing
PROTECTION	Type B - Outdoor Use - Rating IP65
DIMENSIONS	112 (D) x 110 (H) mm
WEIGHT	315 g and 350 g inc. packaging


ORDER CODE	CERTIFICATE	DESCRIPTION
<b>VALKYRIE CS IP65</b>	1328-CPR-0300	CONVENTIONAL WALL SOUNDER - IP65 RATED
<b>VALKYRIE CSB IP65</b>	1328-CPR-0300	CONVENTIONAL WALL SOUNDER/BEACON - IP65 RATED

## SOUNDER TERMINAL CONNECTIONS

*Please note that this device is polarised.*

### Terminals


- C- Negative Supply - Continuous
- P- Negative Supply - Pulsing Output
- + Positive Supply - IN

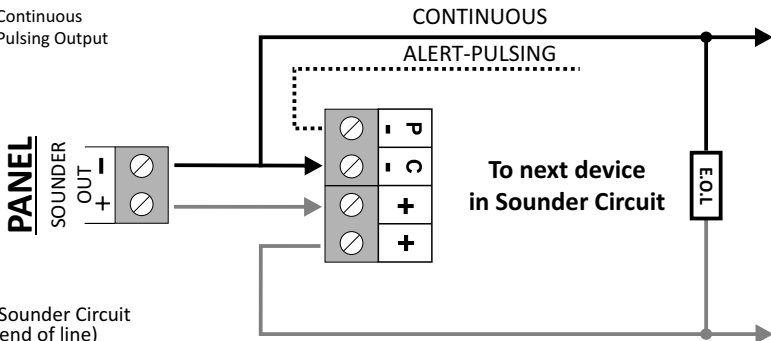



### NOTE:


Only last device in Sounder Circuit should have e.o.l. (end of line) fitted across + and - terminals.

## TONE SELECTION

ON (1)  OFF (0) ALTERNATING HIGH-FREQUENCY TONE  
2.7 KHz - 3.2 KHz

ON (1)  OFF (0) SWEEPING TONE  
800-1000 Hz

ON (1)  OFF (0) CONTINUOUS TONE  
800 Hz

ON (1)  OFF (0) ALTERNATING LOW-FREQUENCY TONE  
800-1000 Hz